


		±
		±
2		±
2		±




Ingestion:

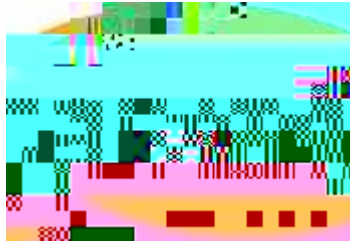

cutting tile to size, opening windows and positioning ventilation fans to disperse the dust generated during the installation. The main hazard of Glazed Porcelain Tile to personnel is through inhalation and lacerations from sharp newly cut edges. The use of properly maintained and serviced cutting equipment and PPE should minimize these risks.

Personal Protection Equipment, PPE:

Personal Protection Equipment, PPE, should be worn at all times when installing Glazed Porcelain Tile. The main risks associated with the installation of tile are

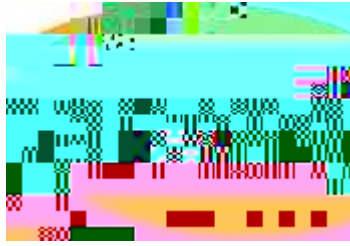

No Data

13. Disposal Consideration

Dispose of in accordance with all federal, state, and local regulations.

14. Transport Information

This material is not regulated by US DOT or Canadian TDG regulations.

15. Regulatory Information

This material is not regulated under any of the following federal regulations:

- TSCA
- CERCLA
- SARA 302, 313

16. Proposition 65 Data

This product contains Silica that is suspected carcinogen. Extreme care should be taken to prevent exposure to the dust generated during installation. Refer to the SDS section for more details.